


Dual Set (inside & outside)

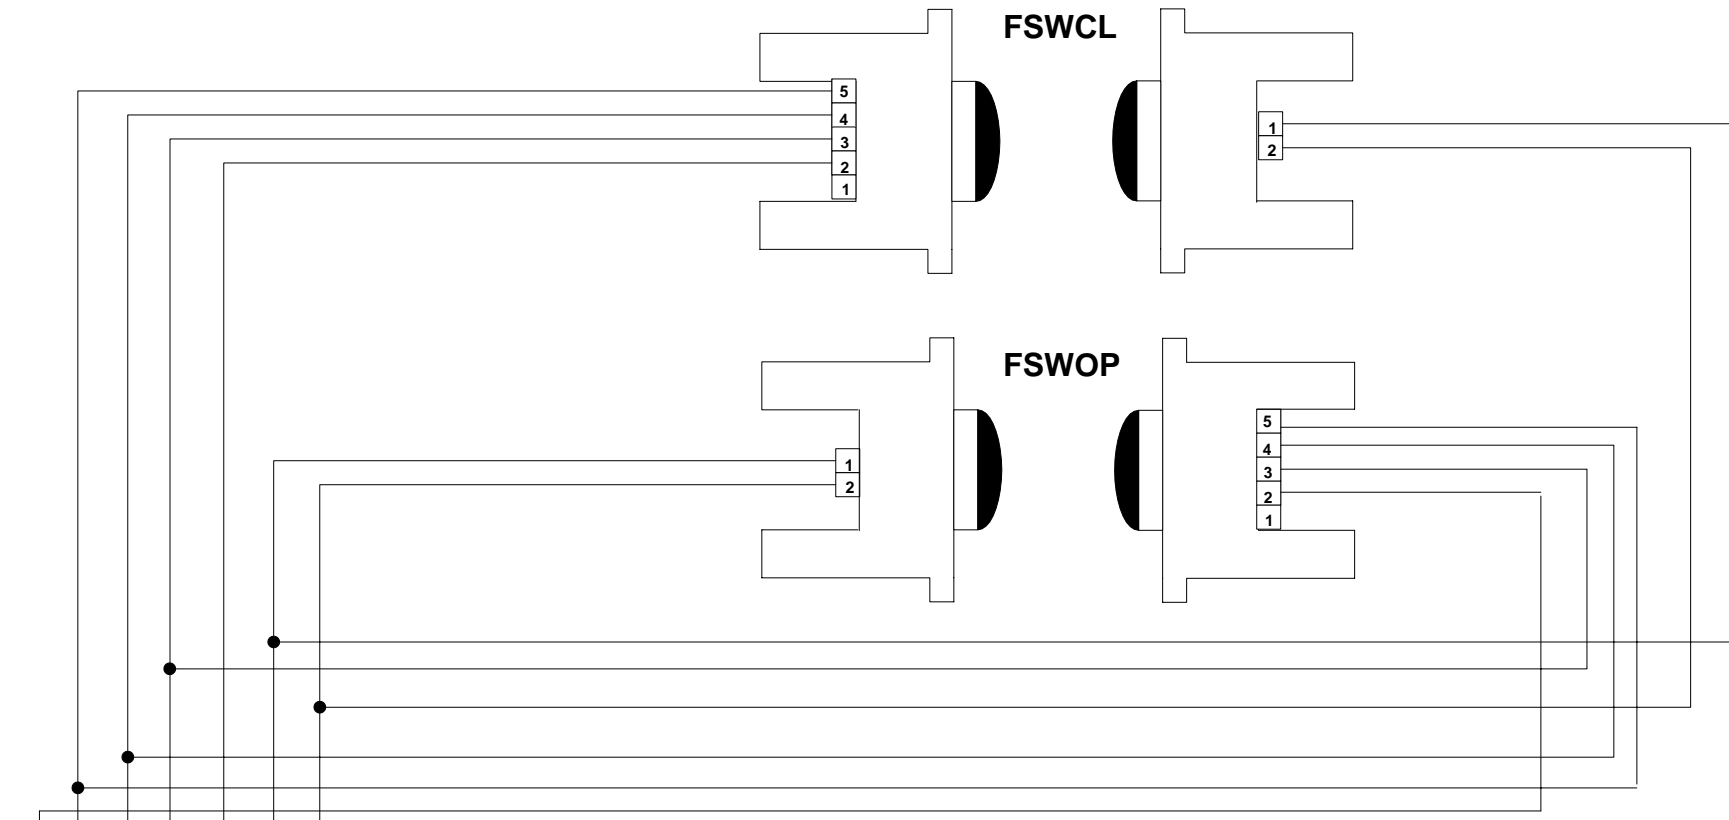

OP	+	-	COM	CL	-	+
13	17	16	19	12	16	17
11	9	10	21	13	21	20
17	5	6	19	17	6	5
7	13	16	5	3	16	13
13	24	23	26	12	23	24
NA	NA	NA	5	2	6	7
NA	NA	NA	1	4	5	6
NA	NA	NA	1	5	6	7
NA	NA	NA	1	4	6	7
NA	NA	NA	9	8	9	10

455 MPS
 450 MPS
 424 MPS-B*
 885 CAT*
 462 DF
 624 MPS**
 746 MPS**
 826 MPS**
 844 MPS**
 401 MPS**

NOTE: In order to comply with UL 325, two sets of FAAC photobeams must be installed. One set should be 6 in. outside the closed gate(s) and act as a closing reversing device. Another set should be 6 in. beyond the swing of the gate(s) and act as an opening reversing device. The installer is responsible for determining the appropriate mounting height.

* See the installation manual for programming
 ** These control panels do not allow an opening photobeams

TITLE: Photobeams	
DRAWN BY: FAAC Technical Dept.	DATE: 10/15/02
SCALE: NS	DRAWING: 1 OF 1
COMPANY: FAAC International, Inc.	